

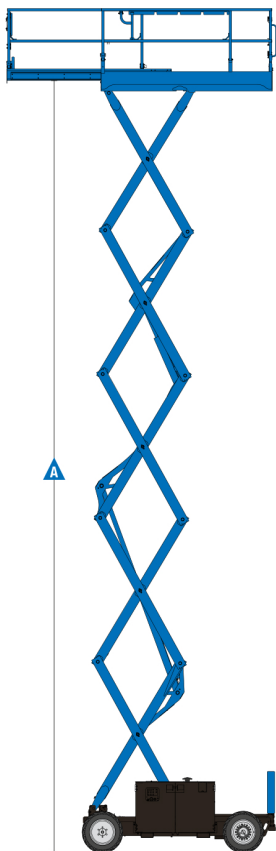




# Self-Propelled Scissor Lifts

## GS-4069 DC

### Specifications



| Models                             | GS-4069 DC |
|------------------------------------|------------|
| Measurements                       | Metric     |
| Working height maximum*            | 14.02 m    |
| <b>A</b> Platform height maximum   | 12.2 m     |
| Drive height                       | 12.2 m     |
| <b>B</b> Platform height - stowed  | 1.65 m     |
| <b>C</b> Platform length - outside | 2.79 m     |
| extended                           | 4.32 m     |
| Slide-out platform extension deck  | 1.52 m     |
| <b>D</b> Platform width - outside  | 1.6 m      |
| Toeboard height                    | 0.15 m     |
| <b>E</b> Height - stowed           | 2.74 m     |
| rails lowered                      | 2.08 m     |
| <b>F</b> Length - stowed           | 3.12 m     |
| platform extended                  | 4.5 m      |
| with outriggers                    | 3.76 m     |
| <b>G</b> Width                     | 1.75 m     |
| <b>H</b> Wheelbase                 | 2.29 m     |
| <b>A</b> Ground clearance - center | 0.24 m     |

### Productivity

|                                   |             |
|-----------------------------------|-------------|
| Maximum platform occupancy**      | 3           |
| Lift capacity                     | 363 kg      |
| Extension deck capacity           | 136 kg      |
| Drive height                      |             |
| Drive speed - stowed              | 7.2 km/h    |
| Drive speed - raised              | 0.5 km/h    |
| Gradeability - uphill stowed***   | 35%         |
| - downhill stowed***              | 15%         |
| Maximum outrigger leveling:       |             |
| front/back uphill                 |             |
| side to side                      |             |
| Turning radius - inside           | 2.11 m      |
| Turning radius - outside          | 4.6 m       |
| Raise/lower speed                 | 61 / 28 sec |
| Non-marking tires - rough terrain | 30 x 66 cm  |

### Power

|                           |  |
|---------------------------|--|
| Power source              | 48V DC<br>(eight 6V batteries,<br>315 Ah capacity) |
| Hydraulic system capacity | 68.1 L   |

### Weight\*\*\*\*

|  |          |
|--|----------|
|  | 4,924 kg |
|--|----------|

### Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* CE/AUS markets: GS™-3369 and GS™-4069 are limited to 2 person platform occupancy when used outdoors.

\*\*\* Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See operator's manual for details regarding slope ratings.

\*\*\*\* Weight varies depending on options and country standards.