




**SELF-PROPELLED SCISSOR LIFTS**

**GS™-3390 RT**



**Specifications**

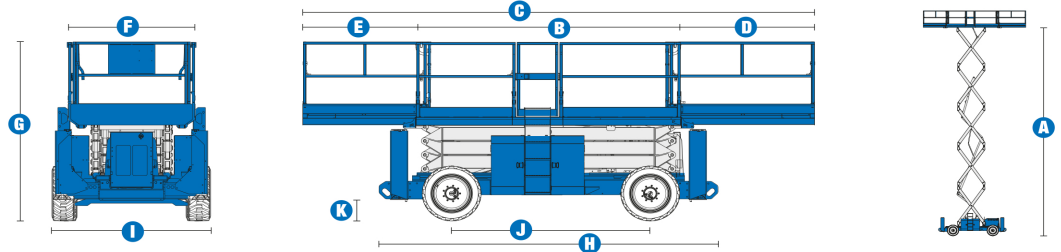

<b>MODELS</b>		<b>GS™-3390 RT</b>
<b>MEASUREMENTS</b>		<b>Metric</b>
Working height maximum*		12.10 m
<b>A</b> Platform height maximum		10.10 m
<b>B</b> Platform length:		3.89 m
outside, extended single deck		5.34 m
<b>C</b> outside, extended dual deck		6.57 m
<b>D</b> Slide-out platform extension deck - front		1.52 m
<b>E</b> Slide-out platform extension deck - rear		1.22 m
<b>F</b> Platform width - outside		1.83 m
Platform height - stowed**		1.55 m
<b>G</b> Height - stowed		2.71 m
rails lowered		2.03 m
<b>H</b> Length - stowed: single deck		3.94 m
dual deck		3.98 m
with outriggers		4.88 m
Length - extended: single deck		5.40 m
dual deck		6.57 m
super deck		7.38 m
<b>I</b> Width - standard tyres		2.29 m
high flotation tyres		2.57 m
<b>J</b> Wheelbase		2.84 m
<b>K</b> Ground clearance - centre		36 cm

<b>PRODUCTIVITY</b>	
Max platform occupancy	7
Lift capacity	1,134 kg
Drive speed - stowed	6.4 km/h
Drive speed - raised	1.1 km/h
Gradeability***	50%
Turning radius - inside	2.16 m
Turning radius - outside	5.33 m
Controls	proportional
Raise / lower speed	45 / 29 sec
Tyres - foam-filled rough terrain	30 x 84 cm

<b>POWER</b>	
Power source	Deutz diesel D2011L03i 49 hp (36 kW), air cooled/ Ford DSG-423 4 cylinder petrol/LPG 75 hp (56 kW)
Fuel tank capacity	113.6 L
Hydraulic system capacity	113.6 L

<b>WEIGHT****</b>	
	5,533 kg
Unit weight modifiers for options	
Outriggers*****	add 760 kg
Dual Extension decks	add 165 kg
Super deck	add 220 kg
Non marking tyres RT	add 466 kg

<b>STANDARDS COMPLIANCE</b>	CE EN280, PB-10-611-03
-----------------------------	------------------------

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Based on RT tyres. Deduct 5.8 cm (2 in) non-marking tyres.  
 \*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards  
 \*\*\*\*\* Standard on GS-5390RT and with super deck.