



SELF-PROPELLED SCISSOR LIFTS

GS™-5390 RT



Specifications



| MODELS | | GS™-5390 RT |
|--|--|-------------|
| MEASUREMENTS | | Metric |
| Working height maximum* | | 18.15 m |
| A Platform height maximum | | 16.15 m |
| B Platform length: | | 3.89 m |
| outside, extended single deck | | 5.34 m |
| outside, extended dual deck | | 6.57 m |
| D Slide-out platform extension deck - front | | 1.52 m |
| E Slide-out platform extension deck - rear | | 1.22 m |
| F Platform width - outside | | 1.83 m |
| Platform height - stowed** | | 2.02 m |
| G Height - stowed | | 3.15 m |
| rails lowered | | 2.47 m |
| H Length - stowed: single deck | | _____ |
| dual deck | | _____ |
| with outriggers | | 4.88 m |
| Length - extended: | | |
| single deck | | 5.40 m |
| dual deck | | 6.57 m |
| super deck | | 7.38 m |
| I Width - standard tyres | | 2.29 m |
| high flotation tyres | | 2.57 m |
| J Wheelbase | | 2.84 m |
| K Ground clearance - centre | | 36 cm |

| PRODUCTIVITY | |
|-----------------------------------|--------------|
| Max platform occupancy | 4 |
| Lift capacity | 680 kg |
| Drive speed - stowed | 6.4 km/h |
| Drive speed - raised | 1.1 km/h |
| Gradeability*** | 40% |
| Turning radius - inside | 2.16 m |
| Turning radius - outside | 5.33 m |
| Controls | proportional |
| Raise / lower speed | 55 / 49 sec |
| Tyres - foam-filled rough terrain | 30 x 84 cm |

| POWER | |
|---------------------------|--------------------------------------|
| Power source | Deutz diesel D2011L03i 49 hp (36 kW) |
| Fuel tank capacity | 113.6 L |
| Hydraulic system capacity | 113.6 L |

| WEIGHT**** | |
|-----------------------------------|------------|
| | 7,615 kg |
| Unit weight modifiers for options | |
| Outriggers***** | _____ |
| Super deck | add 220 kg |
| Non marking tyres RT | add 466 kg |

| STANDARDS COMPLIANCE | CE EN280, PB-10-611-03 |
|----------------------|------------------------|
|----------------------|------------------------|

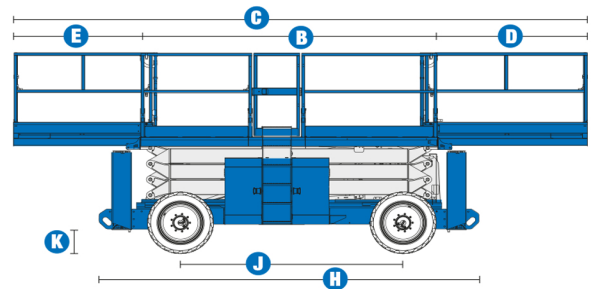

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tyres. Deduct 5.8 cm (2 in) non-marking tyres.
 *** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 **** Weight will vary depending on options and/or country standards
 ***** Standard on GS-5390RT and with super deck.